


Model: Ebony Grafito  
 Size: 25X75 cm (9.8x29.5 in)  
 Thickness: 10.5mm  
 Material type: White Body

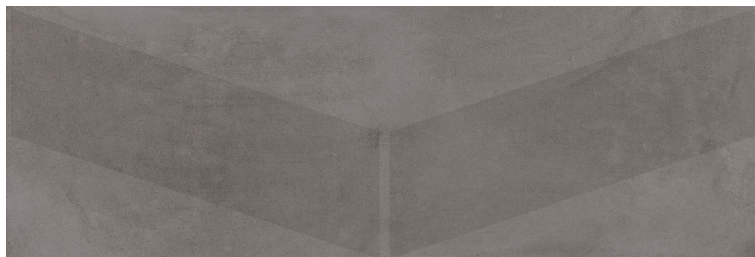

## TECHNICAL DATA

|                                                                      |                                                                                                                |                          |
|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------|
| Manufacture process                                                  | Single-firing                                                                                                  | Dry pressed ceramic tile |
| Length, width, thickness, side straightness, orthogonality, flatness | Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group BIII annex L | UNE EN ISO 10545 Part 2  |
| Water absorption                                                     | E > 10%                                                                                                        | UNE EN ISO 10545 Part 3  |
| Flexion resistance (N/mm.2) and breaking strength (N)                | > 15Nw/mm <sup>2</sup><br>> 600Nw                                                                              | UNE EN ISO 10545 Part 4  |
| Lineal thermic dilatation                                            | < 7*10 <sup>-6</sup> /°C                                                                                       | UNE EN ISO 10545 Part 8  |
| Thermic impact resistance                                            | Stands the test                                                                                                | UNE EN ISO 10545 Part 9  |
| Expansion due to moisture                                            | < 0.6%                                                                                                         | UNE EN ISO 10545 Part 10 |
| Cracking resistance                                                  | Stands the test                                                                                                | UNE EN ISO 10545 Part 11 |

## CHEMICAL RESISTANCE

|                                     |                  |                          |
|-------------------------------------|------------------|--------------------------|
| Domestic cleaning products          | Class A          |                          |
| Swimming pool salt                  | Class A          | UNE EN ISO 10545 Part 13 |
| Acids and bases (low concentration) | Minimum Class LB |                          |
| Stains resistance                   | Minimum Class 4  | UNE EN ISO 10545 Part 14 |

## CE MARKING



CE Declaration of performance:

Nº 003VV2013